


# Recessed Sanitizer / Soap Station

TSL.922

The Recessed Sanitizer / Soap Dispenser Station is an in-wall unit made from AISI 304 stainless steel. The frame can be fitted with an infill panel of the installer's choosing for coordination with the built environment.

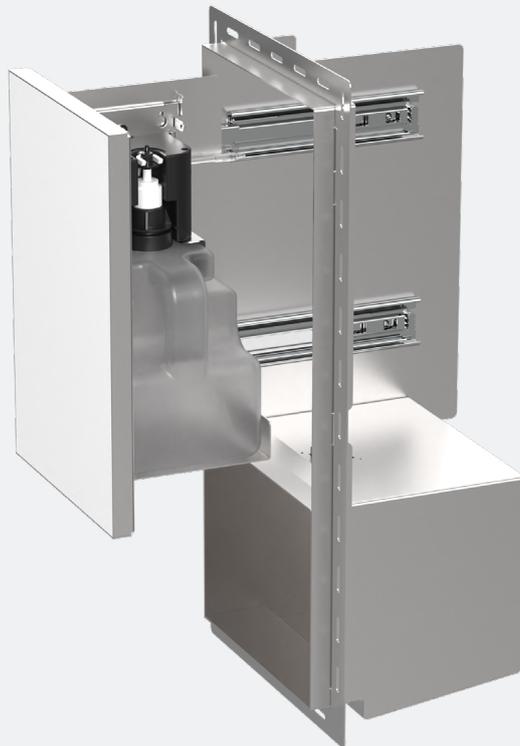

**Technical specifications**

Sensor range preset	2 3/4" ±5/8" (non-adjustable)
Power supply - mains	100-240V ac; 50/60Hz
Rough wall opening	10 3/64" x 23 1/32"
Weight	27.5 lb
Standby power	9mA (unit) 10mA (LED)
Dispensing volume	1.0-1.2ml
Reservoir capacity	0.8 gal
Recommended viscosity (soap/sanitizer gel)	1-3000 cPs
Operation mode	Automatic
Stanless steel grade	AISI 304

**continued on next page**

**Included**


- \_\_\_\_\_ Dispenser frame
- \_\_\_\_\_ Key
- \_\_\_\_\_ Power supply - LED
- \_\_\_\_\_ Power supply - dispenser
- \_\_\_\_\_ Control box
- \_\_\_\_\_ Reservoir

**Not included**

- \_\_\_\_\_ Infill panel
- \_\_\_\_\_ Soap / sanitizer

**Warranty**

1 year limited warranty

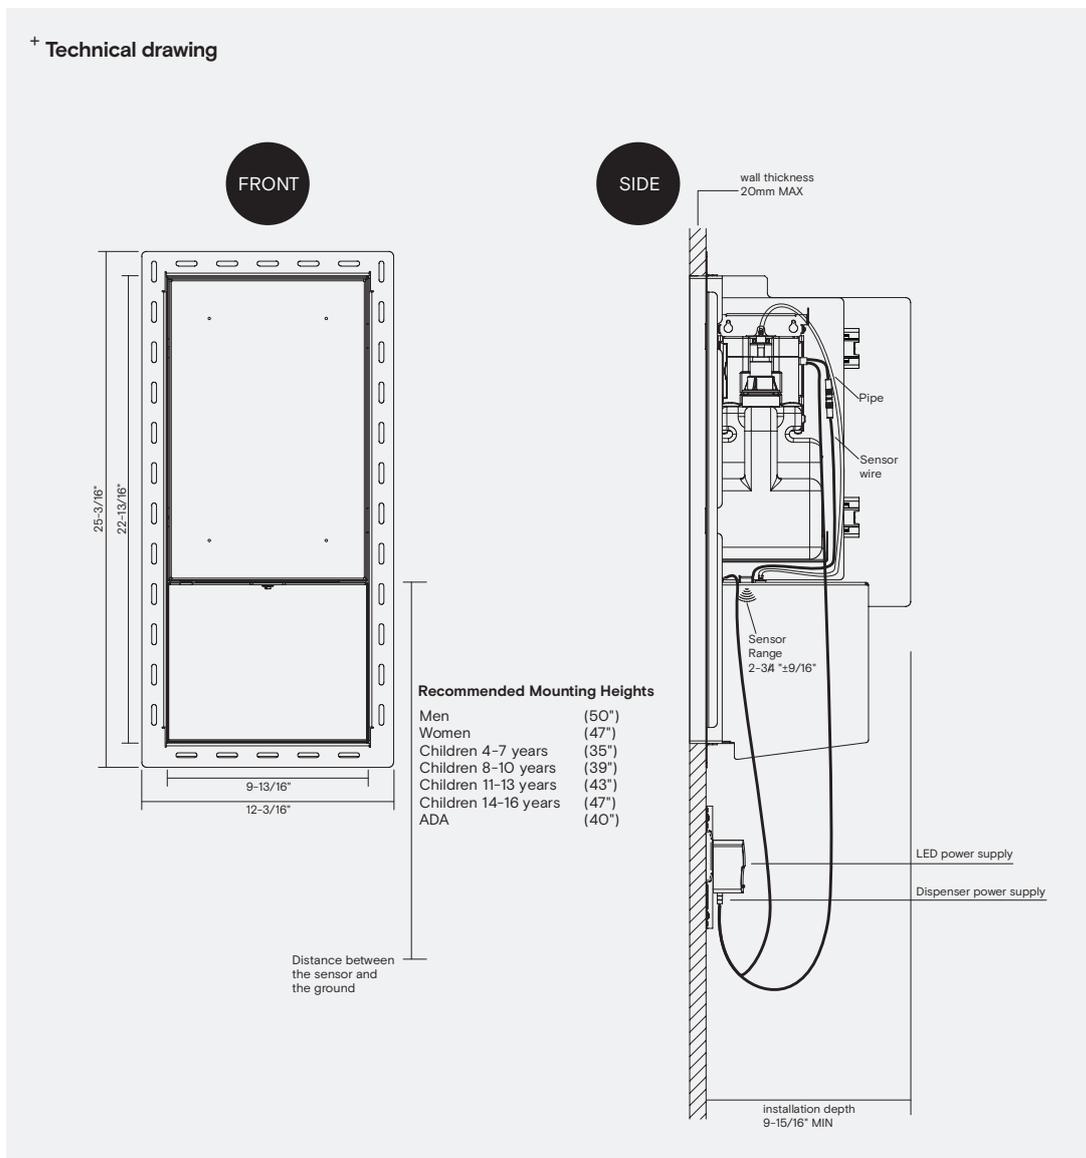

**Spare parts**

For warranty terms and conditions please visit [www.thesplashlab.com](http://www.thesplashlab.com)

If additional spare parts are required and are not listed below, please contact us at [info.usa@thesplashlab.com](mailto:info.usa@thesplashlab.com)

Part	Code
Control Box	TSLP.230286
Plug in Power Supply	TSLP.230283
Sensor Assembly	TSLP.230273
Reservoir	HB3L

**Related products**



**Slim Wall-Mounted Hand Dryer**  
TSL.3001



**Luxury Blue Foam Soap**  
LFS-LB



**Antibacterial Foam Soap**  
LFS-AB



**Recessed Combination Unit / Dryer**  
TSL.LM9