






The Ribbon Soap Dispenser

TSL.R.010

Fully compatible with the The Splash Lab Soap Refill System, the automatic foaming nozzle reliably produces a precise dose of soap every time. The system is easily maintained, with the foaming nozzle simple and quick to replace.

Finish	Codes
● Black	TSL.R.010.BK
● Brass	TSL.R.010.BR
● Satin	TSL.R.010.CS
● Copper	TSL.R.010.CP
● Chrome	TSL.R.010.C
● Bronze	TSL.R.010.BZ



Technical Data

Minimum operating pressure	7 - 87 psi dynamic pressure
Flow rate	0.35 GPM or 0.5 GPM (Other flow rates available upon request)
Weight	2lb 3oz
Stainless steel grade	AISI 304 Stainless steel
Sensor range	Preset 5" (adjustable). Min range 3" +/-20% - Max range 5.9" +/-20%
Comfort delay	2 seconds
Security cut-off	60 seconds To flush 20 seconds after 24 hours of no usage
Power supply - mains	Input: 100 - 240V; 50 - 60Hz Output: 6C DC; 0.5A; 3W max.
Warranty	1 years parts and labor
Run time	Adjustable; 10 seconds factory preset

Installation Requirements

Counter-top cut-out (dia)	1 3/8" diameter
Maximum countertop thickness	1 3/8"
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins, or waste outlets
Access requirements	Solenoids, isolation valves and transformers must be accessible at all times for servicing
Cabling	3 amp fused spur to IP68 rated transformer; low voltage push fit connector to faucet
Power supply	For the mains power option, it is recommended that the sensors are installed on their own circuit to avoid interference from other power demands.

Compliance & Certificates

ADA compliant	
ASME A112.18.1 / CSA 8125.1-2018,	
NSF/ANSI 61-2017	
NSF/ANSI 372-2016,	
International Plumbing Code (IPC)	2018, 2015, 2012 and 2009
International Residential Code (IRC)	2018, 2015, 2012 and 2009
Uniform Plumbing Code (UPC)	2018, 2015, 2012 and 2009
National Plumbing Code of Canada (NPC)	2015, 2010 and 2002
LEED.v4 Compliant for assessment for Water Saving and Efficiency	
BREEAM 5 credits	

Included

The Ribbon Soap Dispenser

Dispenser head assembly

Anti-rotation collar (already installed)

Gasket

Anti-rotation washer

Fixing nut

Soap foaming pipe

Soap reservoir - 0.4 gallons

Hex wrench/ Soap outlet

Soap foamer pump unit

Power supply unit


Not included

Sink

Soap

Outlet (must be provided prior to installation)

+ Technical Drawing

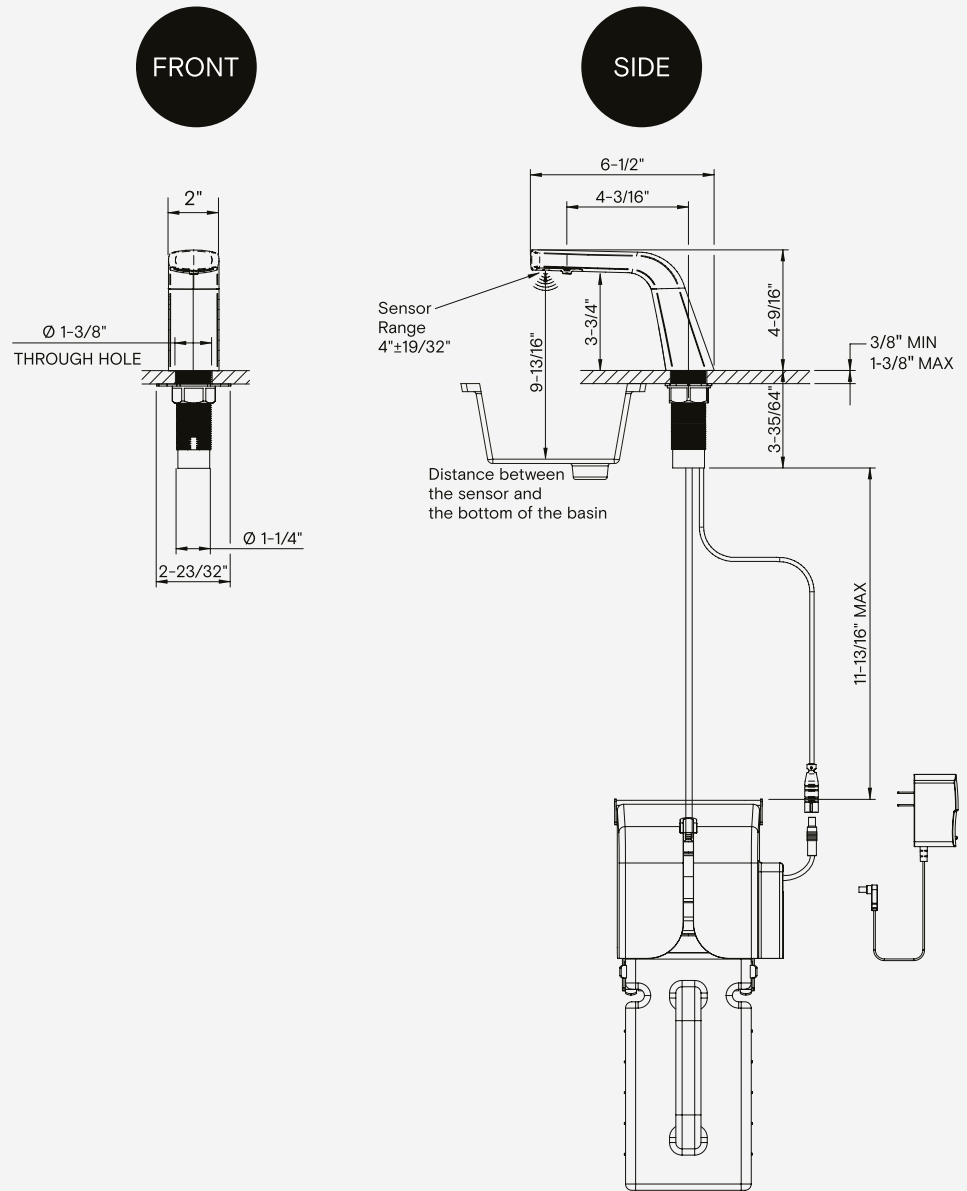

Warranty & Replacement Parts

TSL backs every fixture with a lifetime guarantee against material defect in the finish.

For warranty terms and conditions please visit www.thesplashlab.com/usa/warranty

For replacement parts, please contact The Splash Lab at info.usa@thesplashlab.com for further information.

Related Products



The Ribbon Soap Dispenser
TSL.R021



The Ribbon Hand Dryer
TSL.R030



The Ribbon Sink
TSL.NANO.R